


Aris Waterproof Downlight

IP65 design for different application, 3 inch/4 inch/6 inch/8 inch with various wattage, match different requirement.

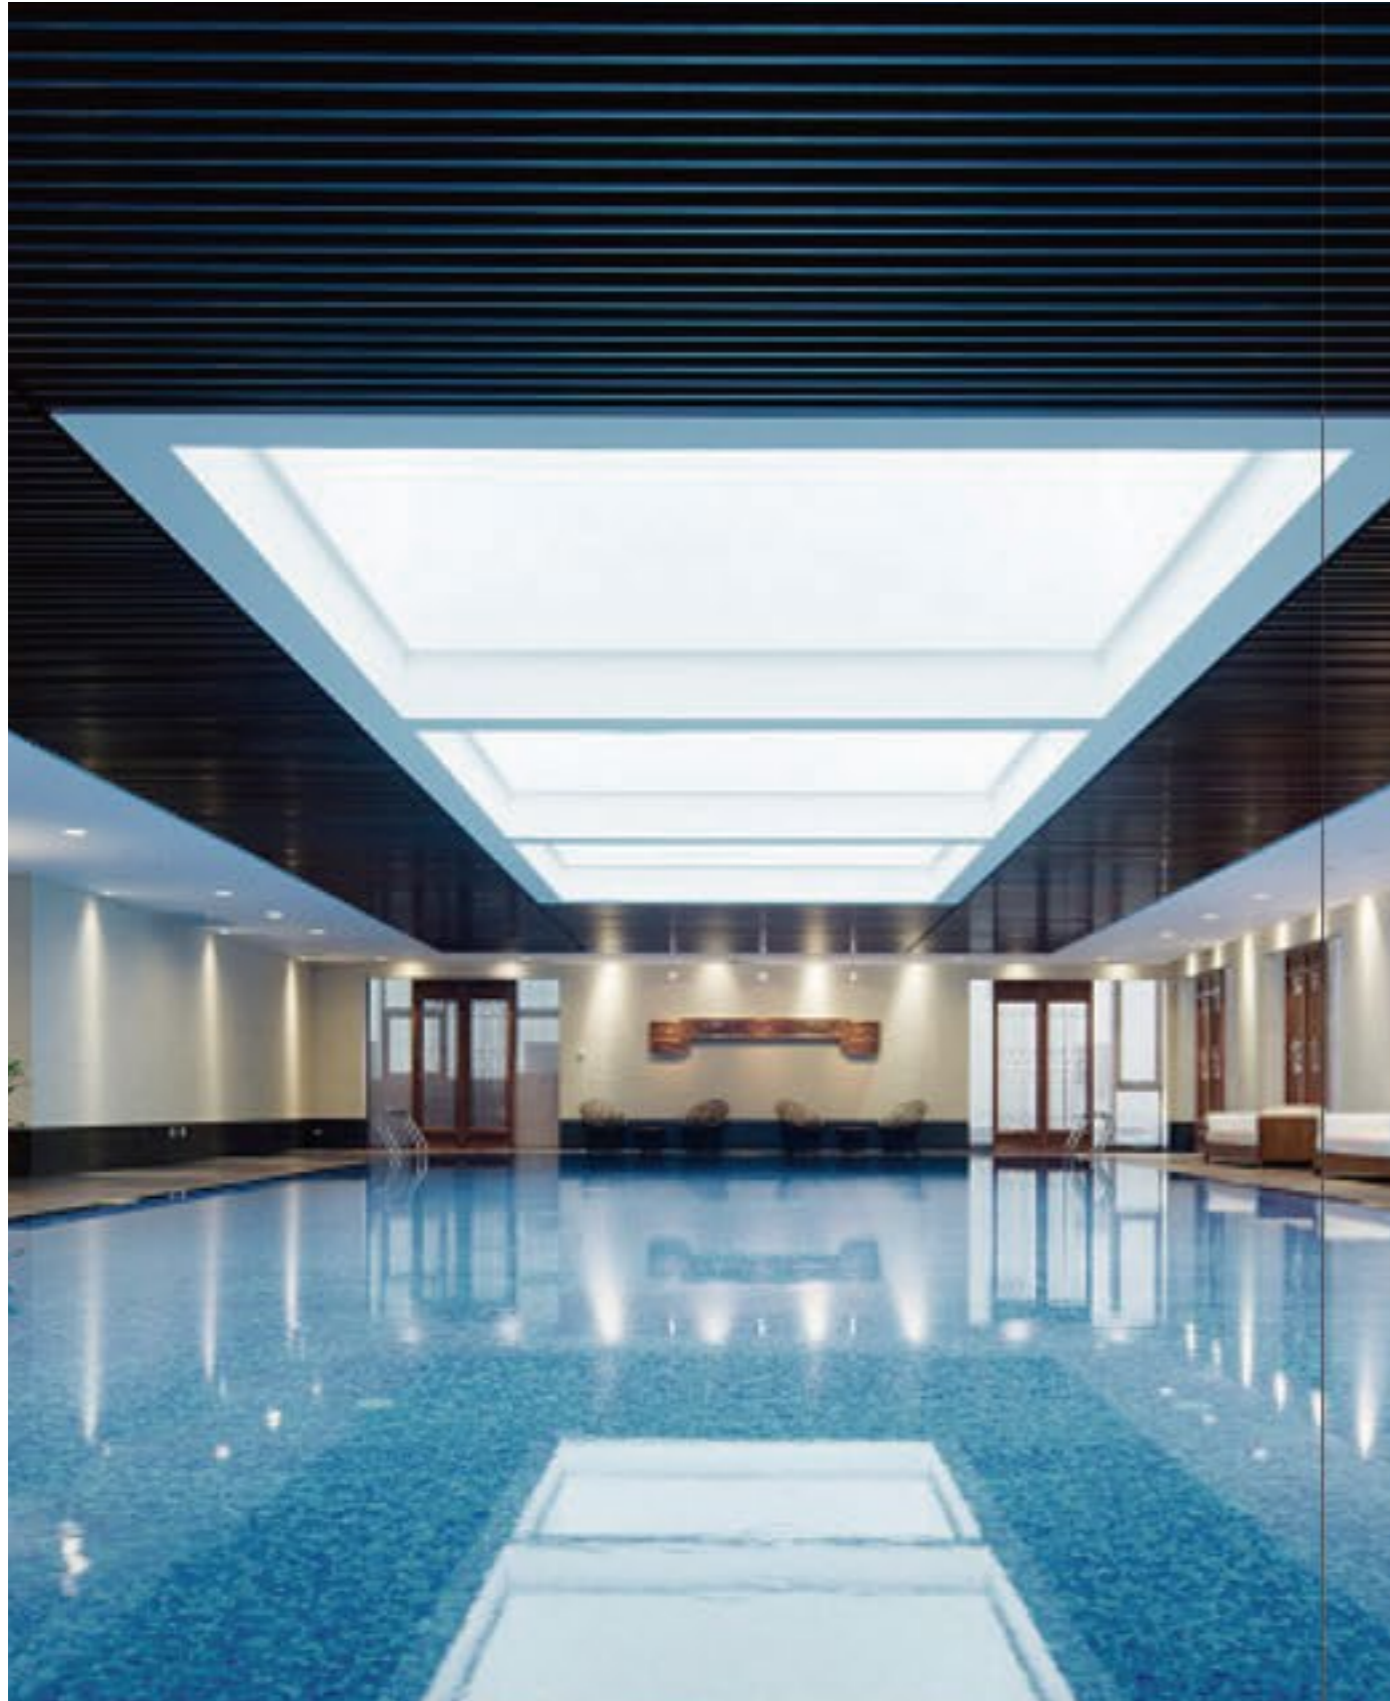


 IP65

Aris Waterproof downlight the fixed type, High efficacy , high CRI 90,with unique optical system of Focus Reflection ,high illuminance, therefore efficient light output and free of glares ,contributes to a comfortable lighted surrounding. This type shall gracefully outlines the exhibits on display, in great harmony with the interior features of the architecture to form a delighted and easy space. The Classical heat radiator of the most reasonable design has significantly improved its efficacy and prolonged its life.

Aris Waterproof Downlight

Single Color series
 Dimmable/ Non-Dimmable
 Color temperature: 3000K/4000K/5000K

Light source: SMD LED
 Voltage: AC220-240V 50/ 60Hz PF>0.95
 Ra: 90
 Beam Angle(°): 90°
 The light body size: 3" / 4" / 6" / 8"
 Dimming Type: Triac / 1-10V / DALI
 CC
 IP level: IP65

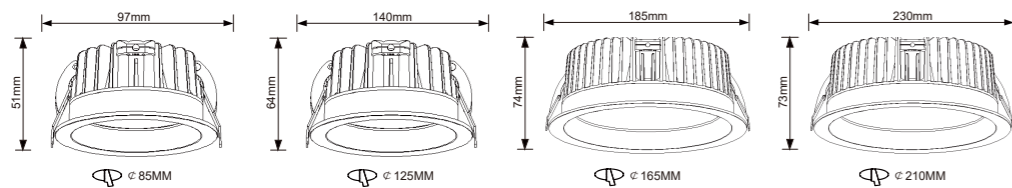

3" 90°
3000K/ 4000K/ 5000K

Photometric Information

[3000K](#) [4000K](#) [5000K](#)

Part No. : CTDA5607NW	Ra	Wattage	Lumen	Luminaire	
Non-Dimmable	90	7W	560lm	Voltage: AC220-240V 50/ 60Hz	
Dimmable	90	8W	560lm	PF>0.95	

4" 90°
3000K/4000K/5000K

Photometric Information

[3000K](#) [4000K](#) [5000K](#)

Part No. : CTDA56(12/ 18)NW	Ra	Wattage	Lumen	Wattage	Lumen
Non-Dimmable	90	12W	950lm	18W	1450lm
Dimmable	90	13W	950lm	20W	1450lm

Luminaire
Voltage: AC220-240V
50/ 60Hz
PF>0.95

6" 90°
3000K/4000K/5000K

Photometric Information

[3000K](#) [4000K](#) [5000K](#)

Part No. : CTDA56(20/ 30)NW	Ra	Wattage	Lumen	Wattage	Lumen
Non-Dimmable	90	20W	1600lm	30W	2400lm
Dimmable	90	22W	1600lm	32.5W	2400lm

Luminaire
Voltage: AC220-240V
50/ 60Hz
PF>0.95

8" 90°
3000K/4000K/5000K

Photometric Information

[3000K](#) [4000K](#) [5000K](#)

Part No. : CTDA56(40/ 60)NW	Ra	Wattage	Lumen	Wattage	Lumen
Non-Dimmable	90	40W	3200lm	60W	6500lm
Dimmable	90	43.5W	3200lm	63.5W	6500lm

Luminaire
Voltage: AC220-240V
50/ 60Hz
PF>0.95

Aris Waterproof Downlight -Tunable Version

Tunable Version series

Color temperature: 3000K-4000K-5700K

tunable in one product

3000K/5700K with 80lm/W while 4000K with 90lm/W

Light source: SMD LED

Voltage: AC220-240V 50/ 60Hz PF>0.95

Ra: 90

Beam Angle(°): 90°

The light body size: 3" / 4" / 6" / 8"

Dimming Type: Triac / 1-10V / DALI

Warranty: 5 years

IP level: IP65

