



Linear Luminaire

SUNWHITE[®] Technology

Linear Luminaire





Through free combination and elegant shape of the linear, the optimal light and shadow effects are constructed, which highlights the ultimate beauty of linear lighting and a comfortable atmosphere.

Helio Pendant Luminaire

45W
 Part No.: H10BCCCCA45P
 Type: Pendant luminaire
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: Black / White
 45W, Input Voltage: AC220-240V, PF>0.9
 Flick free, UGR< 13
 Up: 30W 3000K~6000K, 160°
 Down: 15W 3000K/ 4000K/ 5000K/ 6000K, 36°/ 48°/ 60°
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W
 CRI: >97, R9>95

SunLike LED Inside

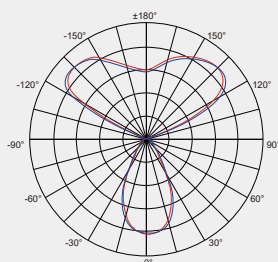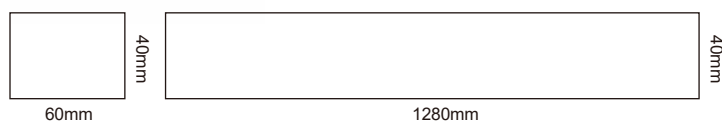



Standard
 Up 160°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 30W 3000lm
 Non-Dimmable
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 15W 1300lm
 Non-Dimmable

Smart
 Up 160°
 CCT: Changeable between 3000K~6000K
 by SUNWHITE
 30W 3000lm
 Dimmable
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 15W 1300lm
 Dimmable
 Dimming Type:
 SUNWHITE/ Bluetooth/ Triac/ 1-10V/ DALI

Helio Pendant Luminaire

60 W
 Part No.: H10BCCCCA60P
 Type: Pendant luminaire
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: Black / White
 60W, Input Voltage: AC220-240V, PF>0.9
 Flick free, UGR< 13
 Up: 42W 3000K~6000K, 160°
 Down: 18W 3000K/ 4000K/ 5000K/ 6000K, 36°/ 48°/ 60°
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W
 CRI: >97, R9>95

SunLike LED Inside

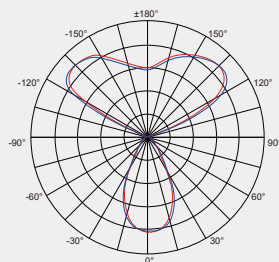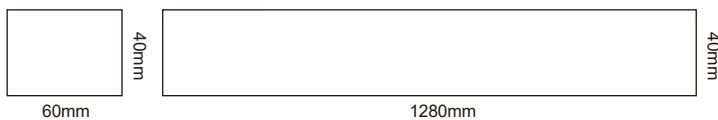

Standard
 Up 160°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 42W 4200lm
 Non-Dimmable
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 18W 1500lm
 Non-Dimmable

Smart
 Up 160°
 CCT: Changeable between 3000K~6000K
 by SUNWHITE
 42W 4200lm
 Dimmable
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 18W 1500lm
 Dimmable
 Dimming Type:
 SUNWHITE/ Bluetooth/ Triac/ 1-10V/ DALI

Apollo Pendant Luminaire *coming soon*

45W

Part No.: H22BCCCCA45P

Type: Pendant luminaire

Housing material: High-quality Aluminum alloy

Surface finish: Electrostatic thermo-painting

Optics material: Lens + Reflector

Warranty: 7 years

Color: Black / White

45W, Input Voltage: AC220-240V, PF>0.9

Flick free, UGR< 13

Up: 30W 3000K~6000K, 160°



Down: 15W 3000K/ 4000K/ 5000K/ 6000K, 36°/ 48°/ 60°

Light source: EMC LED

Luminaire efficiency: 100lm/ W

CRI: >97, R9>95

SunLike LED Inside

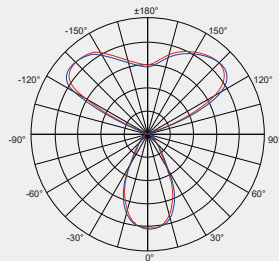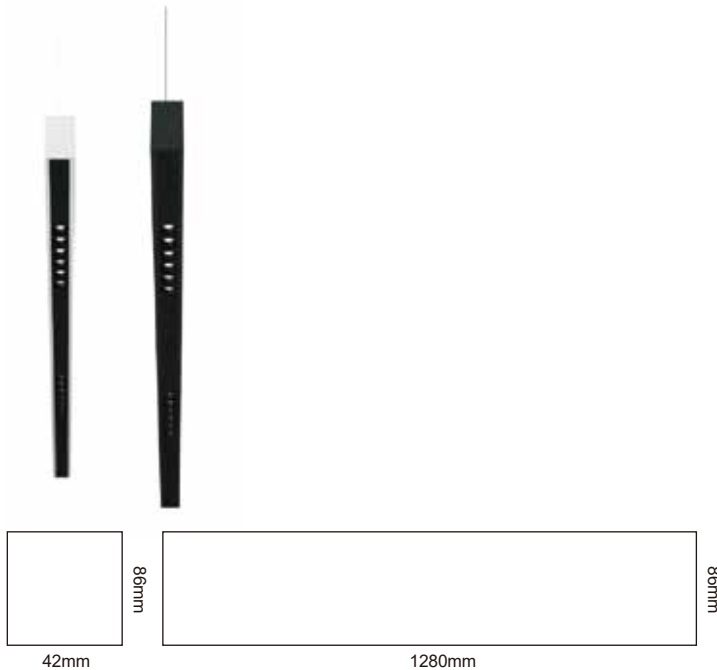

Standard

Up 160°
CCT: 3000K/ 4000K/ 5000K/ 6000K
30W 3000lm
Non-Dimmable

Down 36°/ 48°/ 60°
CCT: 3000K/ 4000K/ 5000K/ 6000K
15W 1300lm
Non-Dimmable



Smart

Up 160°
CCT: Changeable between 3000K~6000K
by SUNWHITE
30W 3000lm
Dimmable
Down 36°/ 48°/ 60°
CCT: 3000K/ 4000K/ 5000K/ 6000K
15W 1300lm
Dimmable
Dimming Type:
SUNWHITE/ Bluetooth/ Triac/ 1-10V/ DALI

Apollo Pendant Luminaire *coming soon*

60 W
 Part No.: H22BCCCCA60P
 Type: Pendant lamp
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: Black / White
 60W, Input Voltage: AC220-240V, PF>0.9
 Flick free, UGR< 13
 Up: 42W 3000K~6000K, 160°
 Down: 18W 3000K/ 4000K/ 5000K/ 6000K, 36°/ 48°/ 60°
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W
 CRI: >97, R9>95



SunLike LED Inside

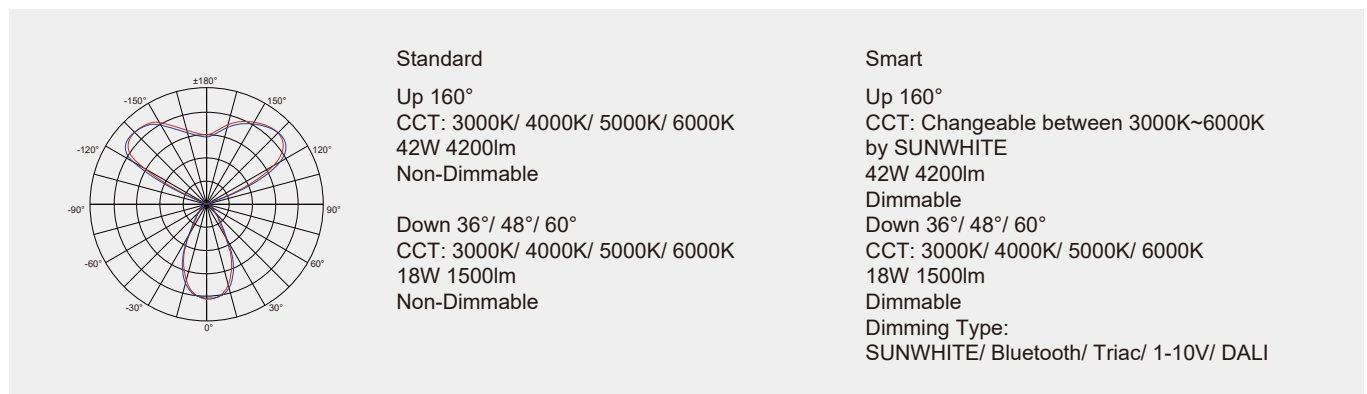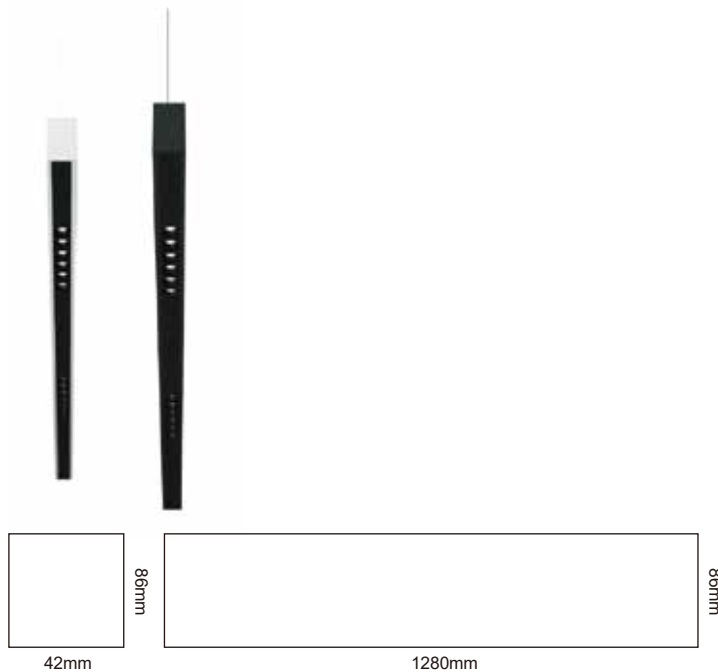

Apollo Pendant lamp S

30W
 Part No.: H20BCCCCA30P
 Type: Pendant luminaire
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: Black / White
 30W, Input Voltage: AC220-240V, PF>0.9
 Flick free, UGR< 13
 Up: 21W 3000K~6000K, 110°
 Down: 9W 3000K/ 4000K/ 5000K/ 6000K, 36°/ 48°/ 60°
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W
 CRI: >97, R9>95

SunLike LED Inside

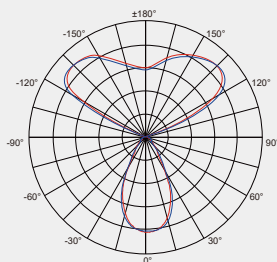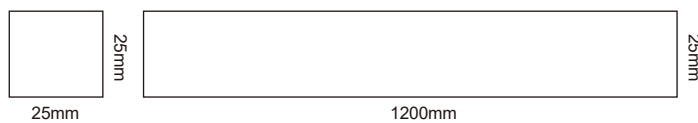

Standard

Up 110°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 21W 2100lm
 Non-Dimmable

Down 36°/ 48°/ 60°
 CCT: 4000K/ 5000K/ 6000K
 9W 800lm
 Non-Dimmable



Smart

Up 110°
 CCT: 3000K~6000K Can be changed
 21W 2100lm
 Dimmable
 Down 36°/ 48°/ 60°
 CCT: 4000K/ 5000K/ 6000K
 9W 800lm
 Dimmable
 Dimming Type:
 SUNWHITE/ Bluetooth/ Triac/ 1-10V/ DALI

Apollo Pendant lamp

45W
 Part No.: H22BCCCCA45P
 Type: Pendant luminaire
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: Black / White
 45W, Input Voltage: AC220-240V, PF>0.9
 Flick free, UGR< 13
 Down: 45W 3000K/ 4000K/ 5000K/ 6000K, 36°/ 48°/ 60°
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W
 CRI: >97, R9>95



SunLike LED Inside

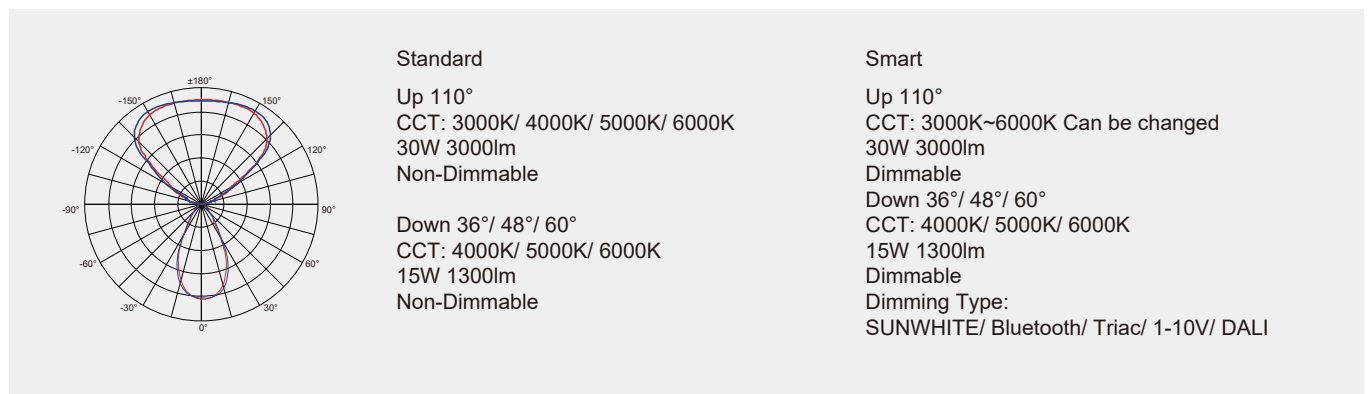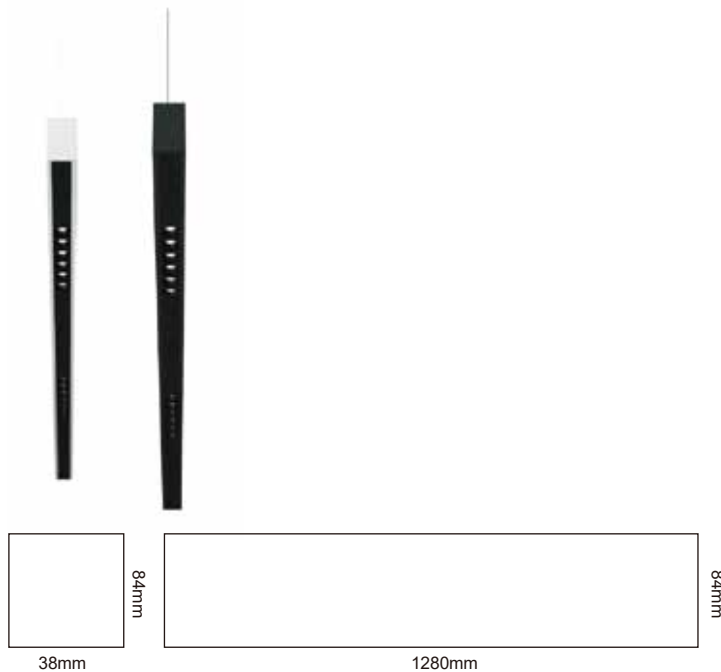

Helio Surfaced Mounted /Recessed/Pendant Luminaire

45W/ 60W Driver Outside
 Part No.: H10B00CCA(45/ 60)S
 Type: Surfaced Mounted/Pendant luminaire
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: White
 45W/ 60W, Input Voltage: AC220-240V, Pf>0.9
 Flick free, UGR< 13
 Down: 3000K/ 4000K/ 5000K/ 6000K, 36°/ 48°/ 60°
 Light source: EMC LED
 Luminaire efficiency: 90lm/ W

SunLike LED Inside

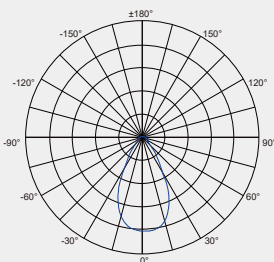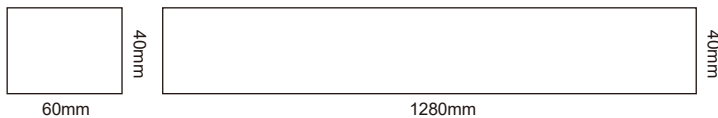

45W 3800lm
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K

Dimming Type: Non-Dimmable/
 Traic/ DALI/ 1-10V/ Bluetooth


60W 5400lm (6000lm Ra90)
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K

Dimming Type: Non-Dimmable/
 Traic/ DALI/ 1-10V/ Bluetooth

Apollo Surfaced Mounted /Pendant Luminaire-S

30W/ 45W Driver Outside
 Part No.: H20B00CCA(30/ 45)S
 Type: Surfaced Mounted/Pendant luminaire
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: White
 30W/ 45W, Input Voltage: AC220-240V, Pf>0.9
 Flick free, UGR< 13
 Down: 45W 3000K/ 4000K/ 5000K/ 6000K, 36/ 48°/ 60°
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W



SunLike LED Inside

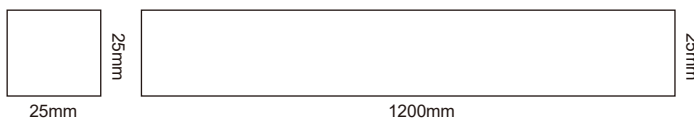

Apollo Surfaced Mounted /Pendant Luminaire

45W/ 60W Driver Outside
 Part No.: H22W00CCA(45/60) (S/ P)
 Type: Surfaced Mounted/Pendant lamp
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: White
 45W/ 60W, Input Voltage: AC220-240V, Pf>0.9
 Flick free, UGR< 13
 Down: 45W/ 60W 3000K/ 4000K/ 5000K/ 6000K, 36/ 48°/ 60°
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W

SunLike LED Inside

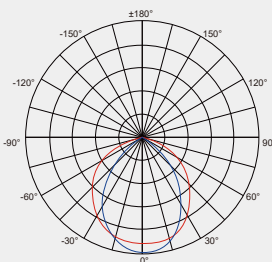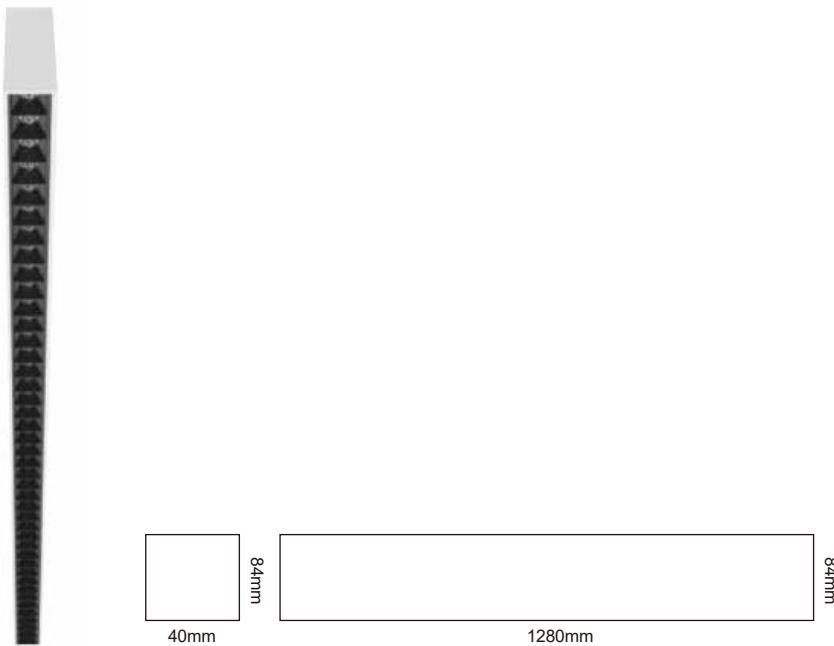

45W 3800lm
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 Dimming Type: Non-Dimmable/
 Traic/ DALI/ 1-10V/ Bluetooth
 CRI: 97, R9>95 Sunlike inside


60W 6000lm
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 Dimming Type: Non-Dimmable/
 Traic/ DALI/ 1-10V/ Bluetooth
 CRI: 90 SMD LED

Apollo Wall Washing Luminaire

30W/ 45W Driver Outside
 Part No.: H23W00CCA(30/ 45) (A/ P/ S)
 Type: Surface Mounted /Accessed/Pendant luminaire
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens
 Warranty: 7 years
 Color: White
 30/45W, Input Voltage: AC220-240V,Pf>0.9
 Flick free, UGR< 13
 Down: 30W/45W 60°
 Smart,3000K~6000K;
 Standard,3000K/4000K/5000K/6000K
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W
 CRI: >97, R9>95 Sunlike inside

SunLike LED Inside


2.4M, 0.6M Available

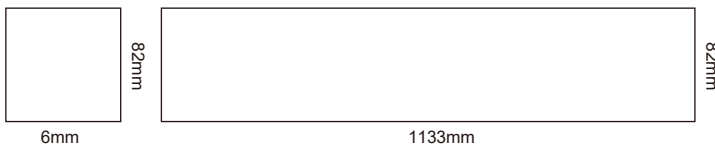

6mm

1133mm

82mm

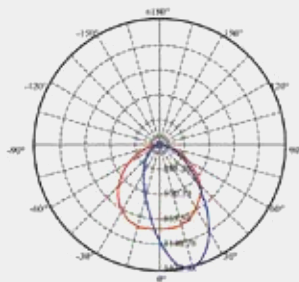

30W 2700lm
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 Dimming Type: Non-Dimmable/
 Traic/ DALI/ 1-10V/ Bluetooth
 CRI: 97, R9>95 Sunlike inside



45W 4500lm
 Down 36°/ 48°/ 60°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 Dimming Type: Non-Dimmable/
 Traic/ DALI/ 1-10V/ Bluetooth
 CRI: 90 SMD LED

Artemi Pendant/ Surface Mounted lamp

45W Driver Outside
 Part No.: H30WCCCA45P
 Type: Pendant luminaire
 Housing material: High-quality Aluminum alloy
 Surface finish: Electrostatic thermo-painting
 Optics material: Lens + Reflector
 Warranty: 7 years
 Color: White
 45W, Input Voltage: AC220-240V, Pf>0.9
 Flick free, UGR< 13
 Side: 30W 3000K~6000K, 120°
 Down: 15W 3000K/ 4000K/ 5000K/ 6000K, 48°/ 60°/ 110°
 Light source: EMC LED
 Luminaire efficiency: 100lm/ W
 CRI: >97, R9>95 Sunlike inside

SunLike LED Inside

1.2M, 2.4M Available

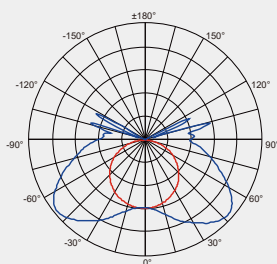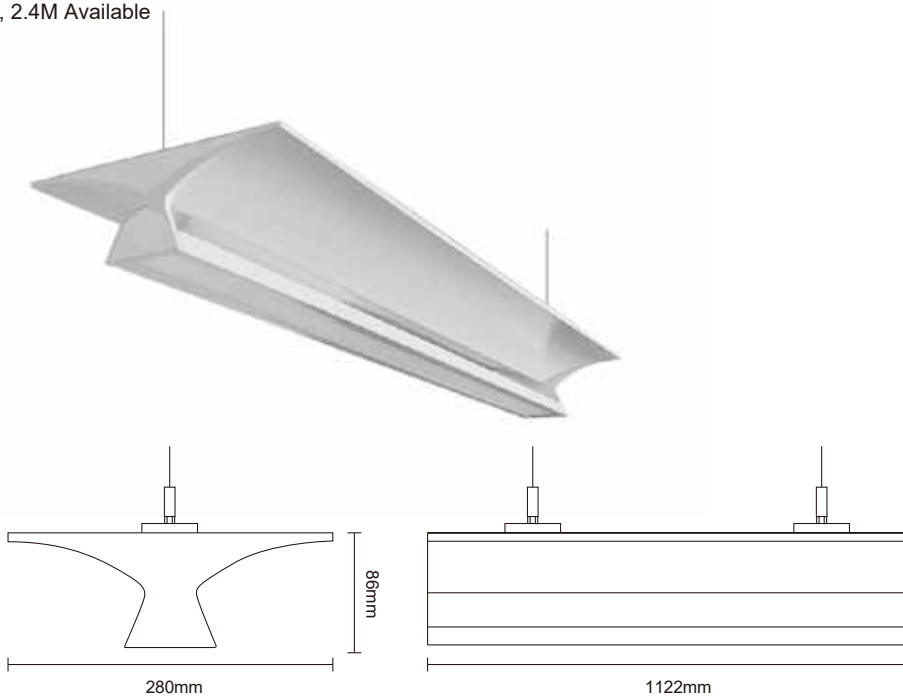

Standard

Side 120°
 CCT: 3000K/ 4000K/ 5000K/ 6000K
 30W 3000lm
 Non-Dimmable

Down 48°/ 60°/ 110°
 CCT: 4000K/ 5000K/ 6000K
 15W 1250lm
 Non-Dimmable

Smart

Side 120°
 CCT: Changeable between 3000K~6000K
 by SUNWHITE
 30W 3000lm
 Dimmable
 Down 48°/ 60°/ 110°
 CCT: 4000K/ 5000K/ 6000K
 15W 1250lm
 Dimmable
 Dimming Type:
 SUNWHITE/ Bluetooth/ Triac/ 1-10V/ DALI